




**OTS Series
Dimmer Suppression Chokes**

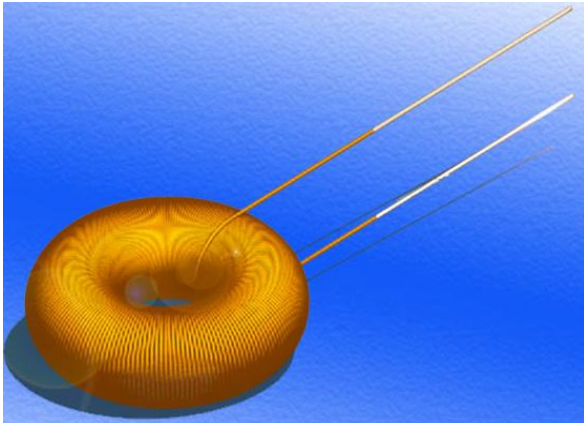

SELECTION GUIDE						
Order Code	Power Handling @240v(W)	Inductance (mH±20%)	DCR Nominal (Ohms)	Dimensions Nominal(mm) (±20%)		
				D	d	H
DVE/100W/4MH	100	4.0	1.8	20	7.5	8
DVE/250W/4MH	250	4.0	0.9	25	7.5	10
DVE/400W/4MH	400	2.9	0.5	30	10	12.5
DVE/500W/4MH	500	2.4	0.4	32	10	12.5

FEATURES & APPLICATIONS

Used in triac control circuits these chokes will ensure circuits for light dimmers, speed control, etc will meet B.S800 interference limits at the power rating shown.

Customer specified inductance values, current ratings, power handling capabilities and core dimensions can be supplied to order.

Dimensions

